



BULL´S-EYE accessories

BULL´S-EYE RD 300 Inspection glass with integrated cleaning equipment: wiper and water nozzle with non-return valve; window glass Ø250/15 mm; ring-seal NBR-rubber, all metal in contact with gas: stainless steel 316, for clearance diameter in core drill or spacing tube: Ø 300 mm
Art. Nr.: 80100001

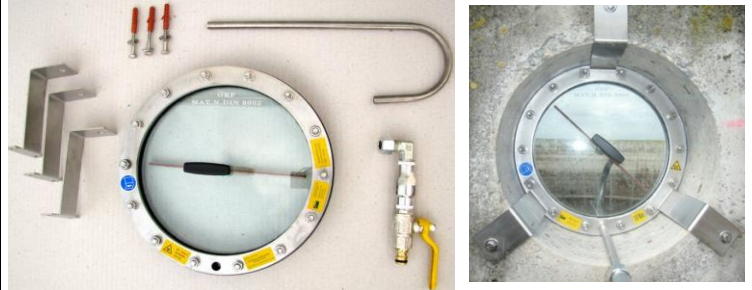

BULL´S-EYE RD 400 Inspection glass with integrated cleaning equipment: wiper and water nozzle with non-return valve; window glass Ø350/15 mm; ring-seal NBR-rubber, all metal in contact with gas: stainless steel 316, for clearance diameter in core drill or spacing tube: Ø 400 mm
Art. Nr.: 80104001

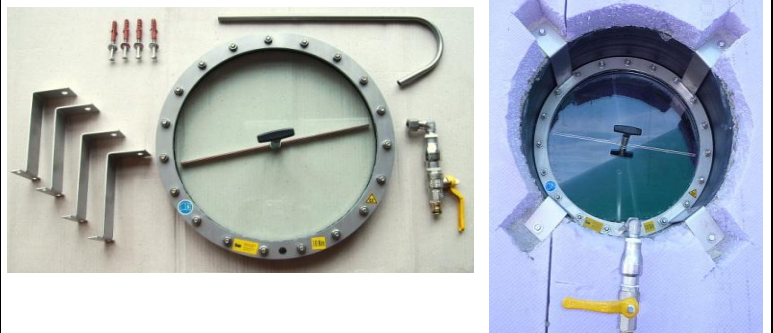


Spacing tube DN 300 & DN 400, as tubular insert in concrete walls, PVC with rubber ribs, for direct assembly of Bull´s-eye, filled with sturdy foam disks for stiffening, available in 20, 25, 30 cm, also available in other requested widths

Art. Nr.: 80120035	DN 300	20cm
Art. Nr.: 80120036	DN 300	25cm
Art. Nr.: 80120037	DN 300	30cm
Art. Nr.: 80124035	DN 400	20cm
Art. Nr.: 80124036	DN 400	25cm
Art. Nr.: 80124037	DN 400	30cm



Inspection lamp IP 65, VILux 230 Volt, 50 W, stainless steel casing with integrated push-button and 3 m cable, incl. mounting parts
Art. Nr.: 80110010





<p>Inspection lamp ATEX II 2GEx (zone1+2), 230 Volt, 50 W, aluminium casing with push button and timer. Typ:Lumi USL07-Ex; bulb halogen12V / including parts for fixed mounting at the bull's eye Art. Nr.: 80110004</p>	
<p>Lamp holder with 2 axis movability for ATEX-lamp, stainless 304 to be fixed directly at the bull's eye RD 300 & RD 400 Art. Nr.: 80110100</p>	
<p>Rosette wall collar for bull's eye RD 300 & RD 400 for proper connection to wall covering, stainless 304, length 200 mm, collar 50 mm, diameter 290/390 mm Art. Nr.: 80120010 RD 300 Art. Nr.: 80120011 RD 400</p>	
<p>Sun protection cover for bull's eye for better visibility with dark background 58 x 58 x 114cm, 2mm aluminium, incl. fixing profile to wall with rain water trench Art. Nr.: 80125000</p>	